

Spring, Tension, Roll Pins

Low Carbon Steel

PT020---X---Z1


Stainless Steel

PT188---X---

Stainless Steel

PT420---X---

Nom Size		Max Diam	C		Wall Thick	Recommended Hole Size	
			Chamfer Diam	Chamfer Length		Min	Min
1/16	.062	.069	.059	.011	.012	.062	.065
5/64	.078	.086	.075	.014	.018	.078	.081
3/32	.094	.103	.091	.018	.022	.094	.097
1/2	.125	.135	.122	.024	.028	.125	.129
5/32	.156	.167	.151	.028	.032	.156	.160
3/16	.187	.199	.182	.036	.040	.187	.192
7/32	.219	.232	.215	.042	.048	.219	.224
1/4	.250	.264	.245	.042	.050	.250	.256
5/16	.312	.328	.306	.060	.062	.312	.318
3/8	.375	.392	.368	.060	.077	.375	.382
7/16	.437	.456	.430	.060	.077	.437	.445
1/2	.500	.521	.485	.060	.094	.500	.510

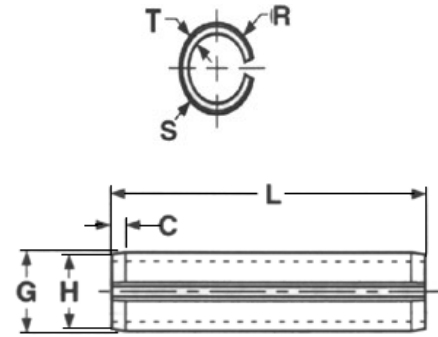

- Notes:
1. Steel Pins – Material is 1075-1095 steel, RC 46-53
 2. Martensitic Passivated Stainless – RC 46-52
 3. 304/18-8 Passivated Stainless Work Hard – No RC Value